

Nano-ITX Series

VIA

EPIA NX


Nano-ITX C7®/Eden™ Board
with MPEG-2, WMV9 & Dual
LVDS

Features

- Integrated VIA UniChrome™ Pro II 3D/2D AGP graphics with MPEG-2 and WMV9 decoding acceleration
- Supports DDR2 533 SDRAM (SODIMM)
- Onboard dual channel LVDS support, additional dual channel LVDS support available with a daughter card
- Supports 10/100 Mbps Ethernet, or manufacturing option for Gigabit Ethernet
- Supports HDTV resolution
- Supports HD Audio
- Low profile design: All back panel I/O in pin header format expect for the RJ-45 LAN connector




Board Placement

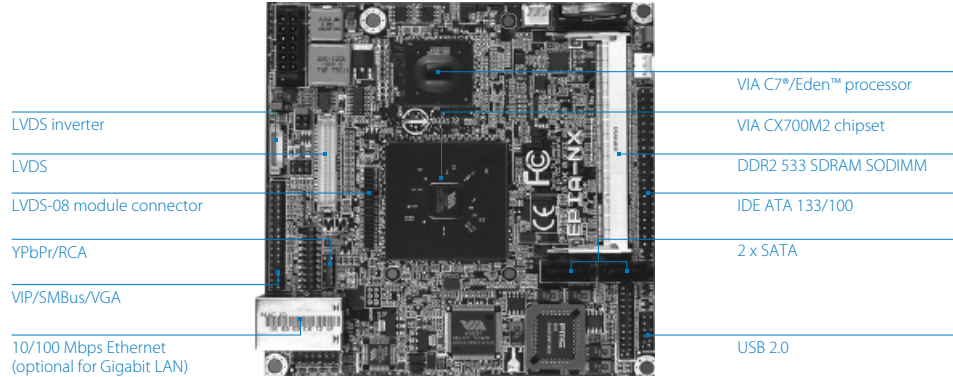


Specifications





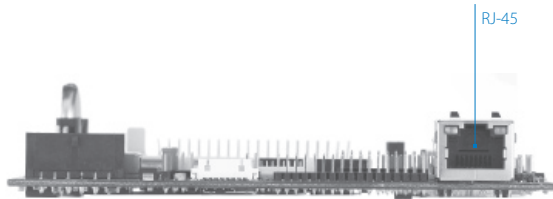

Model Name	EPIA NX15000G	EPIA NX12000EG
Processor	1.5GHz VIA C7®	1.2GHz VIA Eden™
Chipset	VIA CX700M2 Unified Digital Media IGP chipset	
System Memory	1 x DDR2 533 SODIMM socket Up to 1GB memory size	
VGA	Integrated VIA UniChrome™ Pro II 3D/2D AGP graphics with MPEG-2 and WMV9 decoding acceleration	
Expansion Slot	1 x Mini PCI slot	
Onboard IDE	1 x UltraDMA 133/100/66 connector (40-pin pin header)	
Onboard Serial ATA	2 x SATA connectors	
Onboard LAN	1 VIA VT6107 10/100 Mbps Ethernet controller Or manufacturing option for VIA VT 6122 Gigabit Ethernet controller	
Onboard Audio	VIA VT1708A High Definition Audio Codec	
Onboard TV Out	Integrated HDTV TV Encoder	
Onboard I/O Connectors	1 x USB pin connector for 6 additional USB 2.0 ports 1 x LPC connector 1 x LVDS pin connector, for 18/24-bit dual channel LVDS panel 1 x Module connector to support 2nd 18/24-bit dual channel LVDS panel (an add-on card is required) 1 x TV Out pin connector for Composite, S-Video and Component (YPbPr) 1 x Video connector for VGA output, CCIR656/601 video input and SMBus 1 x Audio pin connector for Line-out, Line-in, Mic-in and S/PDIF out 1 x PS2 mouse/keyboard pin connector 2 x Fan pin connectors: CPU/Sys FAN 1 x Nano-ITX power connector	
Back Panel I/O	1 x GigaLAN port	
BIOS	Award BIOS 4/8Mbit flash memory	
Operating System	Windows XP, Windows Embedded CE, Windows Embedded Standard, Linux	
System Monitoring & Management	Wake-on LAN, Keyboard Power-on, Timer Power-on System power management AC power failure recovery	
Operating Temperature	0°C ~ 50°C	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	
Form Factor	Nano-ITX (8-layer) 12 cm x 12 cm	

Back Panel I/O



Accessories




-  **PWB-N550**
DC-DC power board:
12-24V input/120W output
-  **LPC-01**
Expansion module for 4
5V/12V COM port
-  **LPC-02**
Expansion module for 2
RS232 and 2 RS232/422/485
-  **LVDS-08**
Support 18/24-bit LCD
display
-  **WLAN USB Module**
802.11b/g/n standards
-  **WLAN Mini PCI**
802.11 b/g standards

Ordering Information

Model Name	CPU Frequency	Description
NX15000G	1.5GHz C7®	Nano-ITX Board with 1.5GHz C7® CPU, VGA, USB, LAN, Dual LVDS, TV-out, IDE & SATA
NX12000EG	1.2GHz Eden™	Nano-ITX Board with 1.2GHz Eden™ CPU, VGA, USB, LAN, Dual LVDS, TV-out, IDE & SATA

Block Diagram

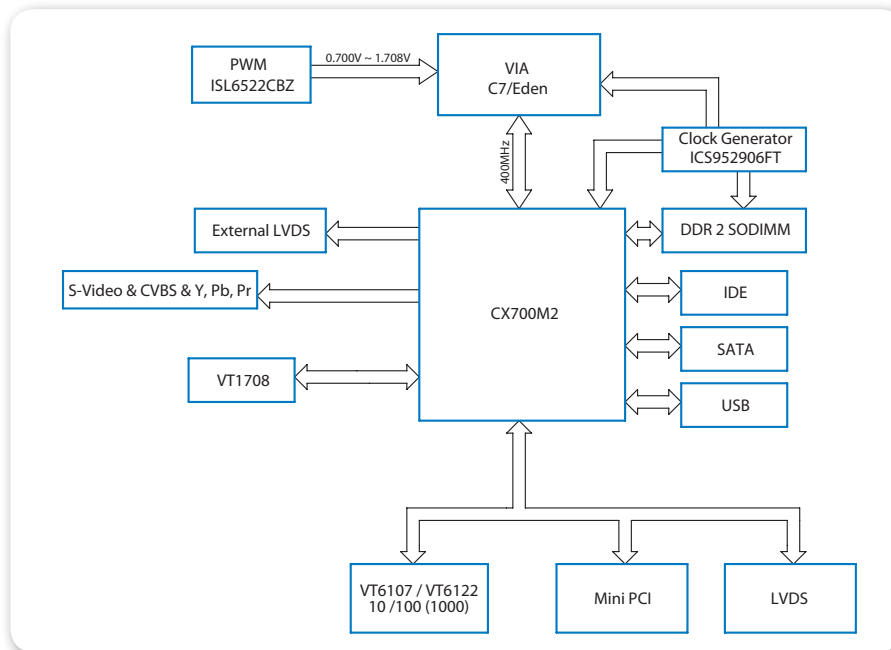

Packing List

Items
1 x ATA-66/100/133 IDE ribbon cable
1 x VGA cable
1 x USB cable
1 x PS2 cable
1 x Power cable
1 x Driver CD